## Ingress Protection (IP) and what it means

The IP Code (or International Protection Rating, sometimes also interpreted as Ingress **Protection Rating**\*) consists of the letters IP followed by two digits and an optional letter. As defined in international standard IEC 60529, it classifies the degrees of protection provided against the intrusion of solid objects (including body parts like hands and fingers), dust, accidental contact, and water in electrical enclosures. The standard aims to provide users more detailed information than vague marketing terms such as waterproof.

#### First Digit: Solids

The first digit indicates the level of protection that the enclosure provides against access to hazardous parts (e.g., electrical conductors, moving parts) and the ingress of solid foreign objects.

Level	Object size protected against	Effective against
0	Not protected	No protection against contact and ingress of objects
1	>50mm	Any large surface of the body, such as the back of the hand, but no protection against deliberate contact with a body part.
2	>12.5mm	Fingers or similar objects.
3	>2.5mm	Tools, thick wires, etc.
4	>1mm	Most wires, screws, etc.
5	Dust Protected	Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment; complete protection against contact.
6	Dust Tight	No ingress of dust; complete protection against contact.


#### Second Digit: Liquids

Protection of the equipment inside the enclosure against harmful ingress of water.

Level	Object size protected against	Effective against
0	Not protected	-
1	Dripping water	Dripping water (vertically falling drops) shall have no harmfull effect.
2	Dripping water when tilted up to 15°	Vertically dripping water shall have no harmful effect when the enclosure is tilted at an angle up to 15° from its normal position.

3	Spraying water	Water falling as a spray at any angle up to 60° from the vertical shall have no harmful effect.
4	Splashing water	Water splashing against the enclosure from any direction shall have no harmful effect.
5	Water jets	Water projected by a nozzle (6.3mm) against enclosure from any direction shall have no harmful effects.
6	Powerful water jets	Water projected in powerful jets (12.5mm nozzle) against the enclosure from any direction shall have no harmful effects.
7	Immersion up to 1m	Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time (up to 1 m of submersion).
8	Immersion beyond 1m	The equipment is suitable for continuous immersion in water under conditions which shall be specified by the manufacturer. Normally, this will mean that the equipment is hermetically sealed. However, with certain types of equipment, it can mean that water can enter but only in such a manner that it produces no harmful effects.

# **IP** (Ingress Protection) Ratings Guide

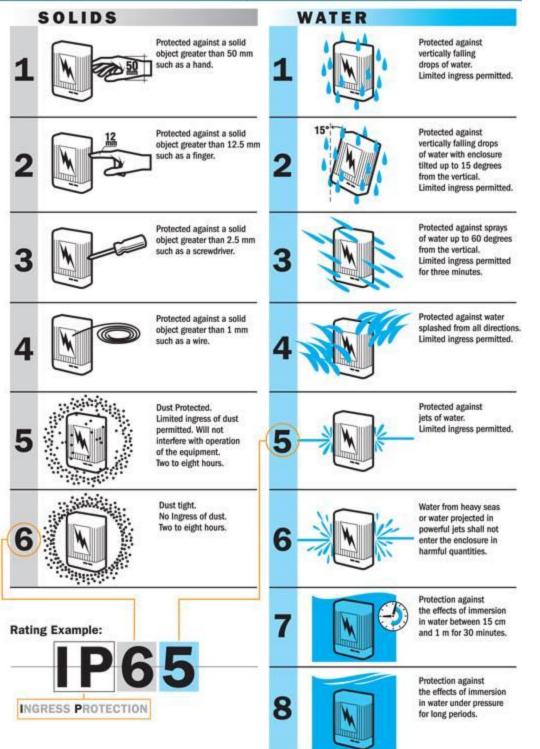

### **IP RATINGS CHART**

IP	EXAMPLE	SOLID PROTECTION	IP	EXAMPLE	LIQUID PROTECTION
	, O	Protected against a solid object greater than 50mm, such as a hand	0	4	Protected against vertically falling drops of water. Limited ingress permitted
		Protected against a solid object greater than 12.5mm, such as a finger	0	4	Protected against vertically falling drops of water w/ enclosure tilted 15° from vertical. Limited ingress permitted
3		Protected against a solid object greater than 2.5mm, such as a scredriver	6	4	Protected against sprays to 60° from the vertical. Limited ingress permitted
		Protected against a solid object greater than 1.0mm, such as a wire	0	<b>H</b>	Protected against water splashed from all directions. Limited ingress permitted
5		Dust Protected. Limited ingress of dust permitted	6	4	Protected against jets of water. Limited ingress permitted
G		Dust Tight. Zero ingress of dust permitted	G	4	Protected against strong jets of water. Limited ingress permitted
	Letters ss Protection)	IP xx		4	Protected against the effects of immersion between 15cm and 1m
(Num Seco	Characteristic Numeral erais O to 6, or letter X) nd Characteristic Numero erais O to 8, or letter X)		8	ц	Protected against long periods of immersion under pressure

## **IP Rating Reference Chart**

Below is an easy to follow reference chart to help you decide which IP rating you need or have.

IP Number	First Digit - SOLIDS	Second Digit - LIQUIDS
IP00	Not protected from solids.	Not protected from liquids.
IP01	Not protected from solids.	Protected from condensation.
IP02	Not protected from solids.	Protected from water spray less than 15 degrees from vertical.
IP03	Not protected from solids.	Protected from water spray less than 60 degrees from vertical.
IP04	Not protected from solids.	Protected from water spray from any direction.
IP05	Not protected from solids.	Protected from low pressure water jets from any direction.
IP06	Not protected from solids.	Protected from high pressure water jets from any direction.
IP07	Not protected from solids.	Protected from immersion between 15 centimeters and 1 meter in depth.
IP08	Not protected from solids.	Protected from long term immersion up to a specified pressure.

IP10	Protected from touch by hands greater than 50 millimeters.	Not protected from liquids.
IP11	Protected from touch by hands greater than 50 millimeters.	Protected from condensation.
IP12	Protected from touch by hands greater than 50 millimeters.	Protected from water spray less than 15 degrees from vertical.
IP13	Protected from touch by hands greater than 50 millimeters.	Protected from water spray less than 60 degrees from vertical.
IP14	Protected from touch by hands greater than 50 millimeters.	Protected from water spray from any direction.
IP15	Protected from touch by hands greater than 50 millimeters.	Protected from low pressure water jets from any direction.
IP16	Protected from touch by hands greater than 50 millimeters.	Protected from high pressure water jets from any direction.
IP17	Protected from touch by hands greater than 50 millimeters.	Protected from immersion between 15 centimeters and 1 meter in depth.
IP18	Protected from touch by hands greater than 50 millimeters.	Protected from long term immersion up to a specified pressure.

ected from touch by fingers and ts greater than 12 millimeters.	Not protected from liquids.
ected from touch by fingers and ts greater than 12 millimeters.	Protected from condensation.
ected from touch by fingers and ts greater than 12 millimeters.	Protected from water spray less than 15 degrees from vertical.
ected from touch by fingers and ts greater than 12 millimeters.	Protected from water spray less than 60 degrees from vertical.
ected from touch by fingers and ts greater than 12 millimeters.	Protected from water spray from any direction.
ected from touch by fingers and ts greater than 12 millimeters.	Protected from low pressure water jets from any direction.
ected from touch by fingers and ts greater than 12 millimeters.	Protected from high pressure water jets from any direction.
ected from touch by fingers and ts greater than 12 millimeters.	Protected from immersion between 15 centimeters and 1 meter in depth.
ected from touch by fingers and ts greater than 12 millimeters.	Protected from long term immersion up to a specified pressure.
ected from tools and wires greater 2.5 millimeters.	Not protected from liquids.
otected from tools and wires greater an 2.5 millimeters.	Protected from condensation.
otected from tools and wires greater an 2.5 millimeters.	Protected from water spray less than 15 degrees from vertical.
otected from tools and wires greater an 2.5 millimeters.	Protected from water spray less than 60 degrees from vertical.
otected from tools and wires greater an 2.5 millimeters.	Protected from water spray from any direction.
otected from tools and wires greater an 2.5 millimeters.	Protected from low pressure water jets from any direction.
_	
	Ats greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from touch by fingers and ts greater than 12 millimeters. Acted from tools and wires greater 2.5 millimeters. Acted from tools and wires greater an 2.5 millimeters. Acted from tools and wires greater Acted from tools

IP38	Protected from tools and wires greater than 2.5 millimeters.	Protected from long term immersion up to a specified pressure.
IP40	Protected from tools and small wires greater than 1 millimeter.	Not protected from liquids.
IP41	Protected from tools and small wires greater than 1 millimeter.	Protected from condensation.
IP42	Protected from tools and small wires greater than 1 millimeter.	Protected from water spray less than 15 degrees from vertical.
IP43	Protected from tools and small wires greater than 1 millimeter.	Protected from water spray less than 60 degrees from vertical.
IP44	Protected from tools and small wires greater than 1 millimeter.	Protected from water spray from any direction.
IP45	Protected from tools and small wires greater than 1 millimeter.	Protected from low pressure water jets from any direction.
IP46	Protected from tools and small wires greater than 1 millimeter.	Protected from high pressure water jets from any direction.
IP47	Protected from tools and small wires greater than 1 millimeter.	Protected from immersion between 15 centimeters and 1 meter in depth.
IP48	Protected from tools and small wires greater than 1 millimeter.	Protected from long term immersion up to a specified pressure.
IP50	Protected from limited dust ingress.	Not protected from liquids.

IP51	Protected from limited dust ingress.	Protected from condensation.
IP52	Protected from limited dust ingress.	Protected from water spray less than 15 degrees from vertical.
IP53	Protected from limited dust ingress.	Protected from water spray less than 60 degrees from vertical.
IP54	Protected from limited dust ingress.	Protected from water spray from any direction.
IP55	Protected from limited dust ingress.	Protected from low pressure water jets from any direction.
IP56	Protected from limited dust ingress.	Protected from high pressure water jets from any direction.
IP57	Protected from limited dust ingress.	Protected from immersion between 15 centimeters and 1 meter in depth.
IP58	Protected from limited dust ingress.	Protected from long term immersion up to a specified pressure.
IP60	Protected from total dust ingress.	Not protected from liquids.
IP61	Protected from total dust ingress.	Protected from condensation.
IP62	Protected from total dust ingress.	Protected from water spray less than 15 degrees from vertical.
IP63	Protected from total dust ingress.	Protected from water spray less than 60 degrees from vertical.
IP64	Protected from total dust ingress.	Protected from water spray from any direction.
IP65	Protected from total dust ingress.	Protected from low pressure water jets from any direction.
IP66	Protected from total dust ingress.	Protected from high pressure water jets from any direction.
IP67	Protected from total dust ingress.	Protected from immersion between 15 centimeters and 1 meter in depth.
IP68	Protected from total dust ingress.	Protected from long term immersion up to a specified pressure.

Protected from steam-jet cleaning.

Protected from total dust ingress.

IP69K